

CATALOG

R E A D Y
B O X 4






VISION

With our range of products, we are specifically focusing on the ecological aspects connected to a new lifestyle, where the outdoors symbolize being in touch with nature, where boundaries disappear and change. Our systems, working with renewable energy sources, are a valid answer to the need to preserve the world that we share with all living beings, to respect it and to keep it untouched.

MISSION

The legacy we have been carrying on for over thirty years is a centuries-old tradition, strongly connected to the Earth and its bounty. Our mission is loyal to the spirit of cultivating, ploughing, manuring, watering, and harvesting. Faithful to our model, we cultivate human relationships and coordinate production with harvest seasons – just as it happens in nature. This *modus operandi* helped us to create a design tailored to evolving markets, and consolidating an organic, consistent set of corporate ethics that creates value and opportunity.

R E A D Y B O X T U N N E L



READY BOX retractable tunnels are made of aluminium for durability, mobility, and ease of use. They offer a customized solution to meet various mobile roofing needs, such as sports, industrial, residential, commercial and logistics applications, without requiring special permits or installation approvals. Depending on the model, we have a variety of configurations that allow versatile use with variable geometries and the possibility of future extensions in length, thanks to the modularity of the structure and the sheets inserted individually in the special lugs of the profiles of each arch. READY BOX tunnels are retractable and foldable roofing systems on wheels, guaranteeing maximum manoeuvrability for the materials used and high weather resistance. Our retractable tunnels are certified for their wind resistance and are made of fully fireproof PVC sheets. The market demands flexible, lightweight, and easy-to-install systems. Aluminum tunnels can be extended in minutes with minimal effort. Steel tunnels cannot meet this requirement, as they are difficult to close due to their weight, and their handling can only be managed with special equipment and a considerable investment of time.

READY BOX 4



READY BOX retractable tunnels, supported by the proper anchoring system and the application of tensioners to each arch, offer amazing wind resistance, reaching up to 100 km/h in their widest variants. The variable actions induced by wind and snow meet the requirements of the current standards for temporary structures.





TECHNICAL DETAILS



TYPE	MATERIALS	TIPES OF WHEEL	STRUCTURE'S VERSIONS
Retractable tunnel	<ul style="list-style-type: none">AluminumPVC	<ul style="list-style-type: none">Rubber wheelNylon wheel with lift proof track	<ul style="list-style-type: none">Side mounted with single pitch gableSide mounted with double pitch gable

STANDARD COLOUR OF THE ALUMINIUM FRAME

Silver anodised

PANTOGRAPH'S STANDARD COLOUR

Ral 9006

STANDARD COLOURS AND MATERIALS OF THE PVC COVER

White
PRS-0112

Champagne
PRS-0234

Poly RS ADR


Grey
PRS-0801

Green
PRS-0601

Black
PRS-0904

- more colours and PVC fabrics available upon request

DIMENSIONS TABLE (cm)

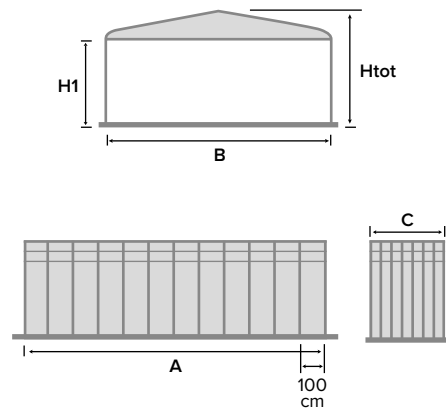

A	H1	C	B				
			800	900	1000	1100	1200
			H tot	H tot	H tot	H tot	H tot
300	300	55	394	403	412	420	429
	400	55	494	503	512	520	529
	500	55	594	603	612	620	629
400	300	70	394	403	412	420	429
	400	70	494	503	512	520	529
	500	70	594	603	612	620	629
500	300	85	394	403	412	420	429
	400	85	494	503	512	520	529
	500	85	594	603	612	620	629
600	300	100	394	403	412	420	429
	400	100	494	503	512	520	529
	500	100	594	603	612	620	629
700	300	115	394	403	412	420	429
	400	115	494	503	512	520	529
	500	115	594	603	612	620	629
800	300	130	394	403	412	420	429
	400	130	494	503	512	520	529
	500	130	594	603	612	620	629
900	300	145	394	403	412	420	429
	400	145	494	503	512	520	529
	500	145	594	603	612	620	629
1000	300	159	394	403	412	420	429
	400	159	494	503	512	520	529
	500	159	594	603	612	620	629
1100	300	174	394	403	412	420	429
	400	174	494	503	512	520	529
	500	174	594	603	612	620	629
1200	300	189	394	403	412	420	429
	400	189	494	503	512	520	529
	500	189	594	603	612	620	629

TECHNICAL DETAILS

Gable

Extended Tunnel

STANDARD COLOR OF THE ALUMINIUM FRAME

Silver anodised


STANDARD COLOR OF THE PVC COVER

White	Green	Champagne	Grey	Black	
Poly RS ADR	PRS-0112	PRS-0601	PRS-0234	PRS-0801	PRS-0904


*See fabric sheet at p. 48, more colors available upon request

STANDARD COLOR OF THE ALUMINIUM CROSS PANTOGRAPHS


Ral 9006

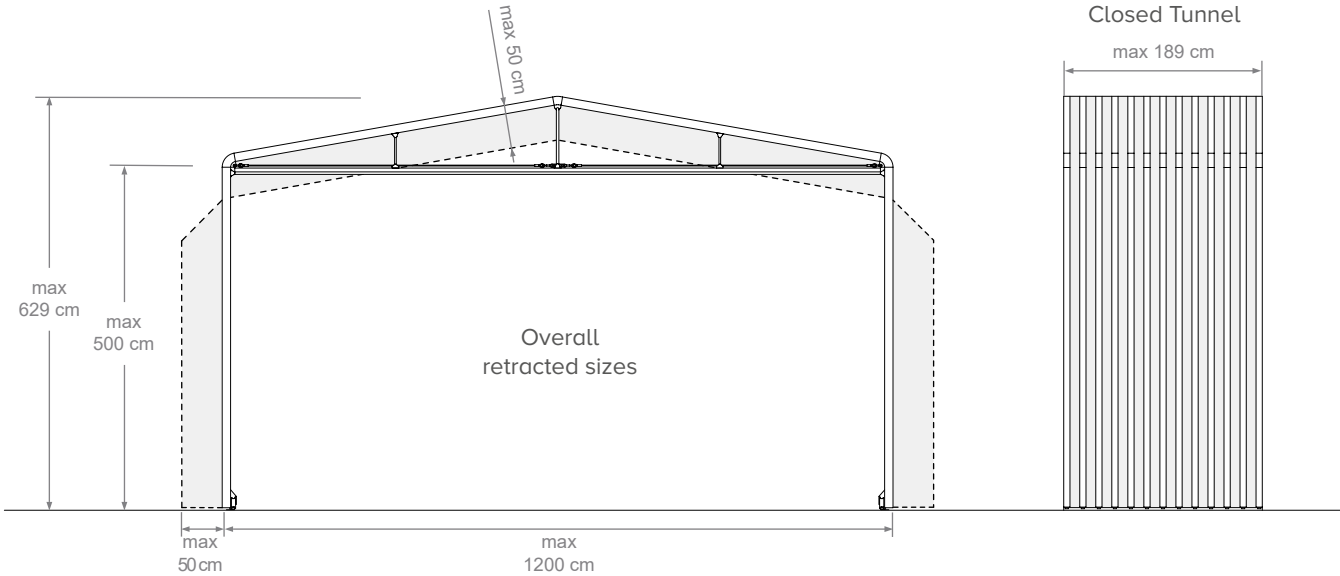


MAIN PROFILE




PANTOGRAPH

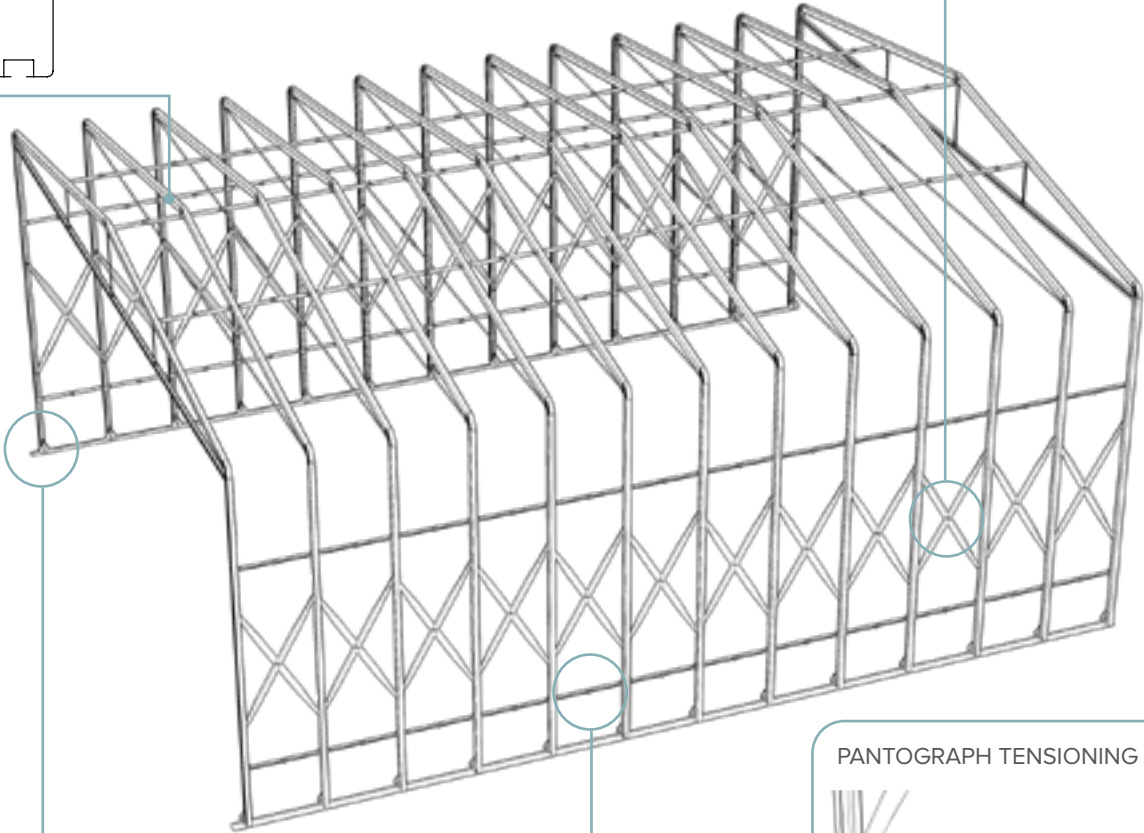


PANTOGRAPH TENSIONING SYSTEM

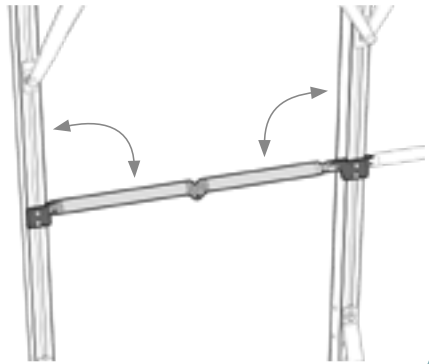

TYPES OF WHEEL



NYLON WHEEL WITH HOT-DIP GALVANIZED STEEL LIFT PROOF TRACK




SOLID RUBBER TYRE

TECHNICAL APPENDIX

TECHNICAL APPENDIX - SLIDING CLOSURE

DIMENSIONS TABLES OF SLIDING CLOSURES (cm)

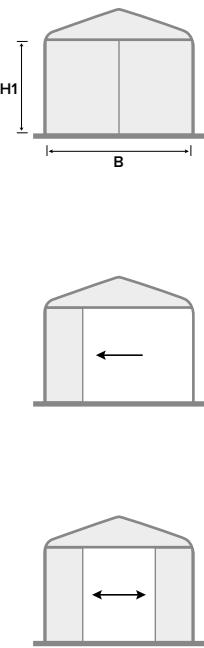

RB1 Tunnel

B	H1
200	200
	220
	240
240	200
	220
	240
280	200
	220
	240
300	200
	220
	240

RB1 Extra

B	H1
300	200
	250
	300
350	200
	250
	300
400	200
	250
	300
450	200
	250
	300

RB1 XL

B	H1
300	200
	250
	300
	350
	400
350	200
	250
	300
	350
	400
400	200
	250
	300
	350
	400
450	200
	250
	300
	350
	400
500	200
	250
	300
	350
	400

RB2

B	H1
400	250
	300
	350
	400
	450
500	250
	300
	350
	400
	450
600	250
	300
	350
	400
	450
700	250
	300
	350
	400
	450
800	250
	300
	350
	400
	450

RB4

B	H1
800	300
	400
	500
900	300
	400
	500
1000	300
	400
	500
1100	300
	400
	500
1200	300
	400
	500

RB6


B	H1
1000	400
	500
1100	400
	500
1200	400
	500
1300	400
	500
1400	400
	500
1500	400
	500

PVC SLIDING CLOSURES
with side opening




WALL VERSIONS

Plain



With windows




PVC COLOUR

- White PRS-0112
- Champagne PRS-0234
- Grey PRS-0801
- Green PRS-0601
- Black PRS-0904

- more colors available upon request




Transparent



PVC TYPE

- Crsistalplus 800 FR

Closure system



COMPATIBLE WITH:

- Ready Box 1 XL
- Ready Box 1 Extra
- Ready Box 2
- Ready Box 4
- Ready Box 6

COMPATIBLE WITH:

- Ready Box 1 Tunnel
- Ready Box 1 Garage

TECHNICAL APPENDIX - SPECIAL SHAPES


PVC SLIDING CLOSURES
with central opening



SIDE MOUNTED
with single pitch gable




WALL VERSIONS

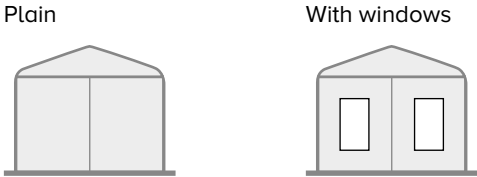

- PVC COLOUR
- White PRS-0112
 - Champagne PRS-0234
 - Grey PRS-0801
 - Green PRS-0601
 - Black PRS-0904


- more colors available upon request

Transparent



- PVC TYPE
- Crsistalplus 800 FR




Closure system

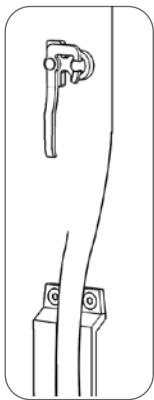

- COMPATIBLE WITH:
- Ready Box 1 XL
 - Ready Box 1 Extra
 - Ready Box 2
 - Ready Box 4
 - Ready Box 6






- COMPATIBLE WITH:
- Ready Box 1 Tunnel



- COMPATIBLE WITH:
- Ready Box 2, Ready Box 4, Ready Box 6


TECHNICAL APPENDIX - SPECIAL SHAPES

SIDE MOUNTED
with double pitch gable



COMPATIBLE WITH:
Ready Box 2, Ready Box 4, Ready Box 6

SLOPED MODULE
vertical sloped module for change of slope




COMPATIBLE WITH:
Ready Box 1 Tunnel, Ready Box 1 Extra, Ready Box 1 XL, Ready Box 2

TECHNICAL APPENDIX - SPECIAL SHAPES

SLOPED MODULE


horizontal sloped module for changing direction



COMPATIBLE WITH:
Ready Box 1 Tunnel, Ready Box 1 Extra, Ready Box 1 XL, Ready Box 2

SLOPED MODULE


horizontal sloped module for changing direction - details




COMPATIBLE WITH:
Ready Box 1 Tunnel, Ready Box 1 Extra, Ready Box 1 XL, Ready Box 2

TECHNICAL APPENDIX - OPTIONALS


ANCHORAGE
steel cables



ANCHORAGE
eyelet

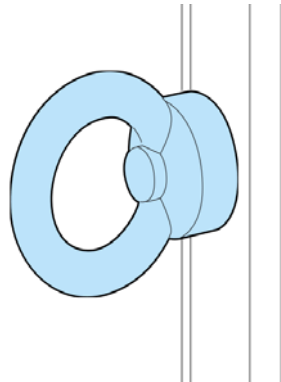

STAKE
round type c




STAKE
t-shaped type b




TECHNICAL APPENDIX - OPTIONALS

ANCHORAGE
concrete ballast - 200 kg




ANCHORAGE
plastic ballast - fillable



ANCHORAGE
safety strap




SOFT PVC CONNECTION



TECHNICAL APPENDIX - OPTIONALS


WINDOWS




WINDOWS TYPE:

- Transparent window in a Cristalplus 800 F/R
- Roll-up with clear Cristalplus 800 F/R insert
- Roll-up with mesh Soltis 96 insert
- Roll up opening (without insert)

LIFT PROOF TRACK
made of stainless steel



STRIPED PVC COVER




BRANDING




TECHNICAL APPENDIX - OPTIONALS

TIE BACK STRAPS

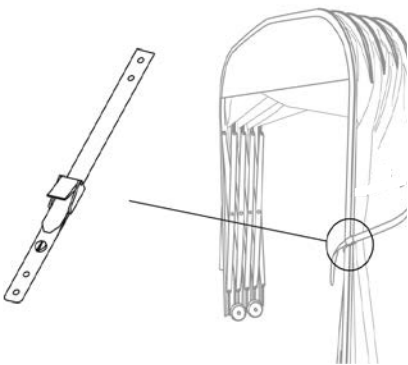

HANDLE



WIND LOAD RESISTANCE

Tunnel model	Maximum dimensions			Material	Maximum wind speed [km/h]	
	Side B [cm]	Useful height [cm]	Total height [cm]	Aluminium alloy	With lift proof track	With side tie-rods
Ready Box 1 Tunnel	300	240	277	EN AW 6060 (Al Mg Si), Hardening T6	60	85
Ready Box 1 Extra	450	300	361	EN AW 6060 (Al Mg Si), Hardening T6	70	100
Ready Box 1 XL	500	350	399	EN AW 6060 (Al Mg Si), Hardening T6	70	100
Ready Box 2	800	400	460	EN AW 6060 (Al Mg Si), Hardening T6	100	100
Ready Box 4	1200	500	629	EN AW 6005 (Al Mg Si), Hardening T6	100	100
Ready Box 6	1500	500	659	EN AW 6005 (Al Mg Si), Hardening T6	100	100

GUARANTEE AND QUALITY

- The products are CE certified. The booklet with the DOP declaration of performance accompanies the product until its complete installation.
- Fireproof certificates are provided for each type of fabric used.
- The structures are structurally checked and comply with the loads required by the standards in force UNI EN 13782:2015 Temporary structures - Tents - Safety, DM 17 January 2018 Technical construction standards and UNI EN 1999 Eurocode 9 - Design of aluminum structures.
- The aluminum structural elements are guaranteed for five years*.
- Since 1990, we design and manufacture our collections entirely in Italy in our factory in Poggio Renatico.

* For more details on the guarantee, please refer to the general conditions of Giulio Barbieri S.r.l. published in the official price list.

FABRIC MAINTENANCE AND REPLACEMENT

- Giulio Barbieri tunnels are made of aluminum, which is naturally not subject to corrosion, and therefore does not require maintenance. All parts are easily replaceable, including the PVC fabric. The PVC modules are designed to be easily removed and replaced. This makes it possible to periodically and inexpensively change the tunnel's graphic personalization.

CONTACTS

Giulio Barbieri S.r.l.

Via Ferrara, 41
44028 Poggio Renatico (FE) - Italy
info@giuliobarbieri.it
Tel. (+39) 0532 821511
Fax (+39) 0532 821555

www.giuliobarbieri.it



The images contained in this catalog belong to Giulio Barbieri S.r.l. Any kind of unauthorized reproduction is strictly forbidden. The information regarding the Retractable Systems Giulio Barbieri contained in this catalog may change as a result of the finalization of the commercial offer.



giuliobarbieri.it